

LMG-C


軸心式自潤滑軌(不生銹)

LMGL-C


Anticorrosive Oilless Linear Guide

滑塊：自潤線性軸承式

Linear Block：Oilless bearing type

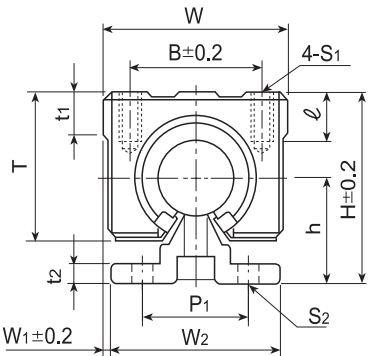

LMG-C
LMG-C12 ~ LMG-C40

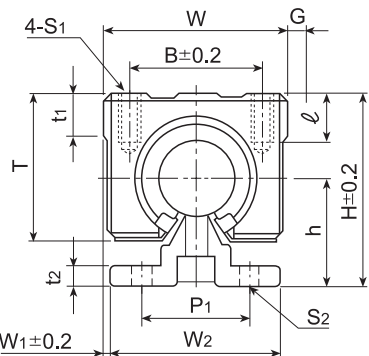

LMGL-C
(加長型/Long Type)
LMGL-C12 ~ LMGL-C30

型 號 Model No.	軸徑 Shaft diameter	組 合 尺 寸 Dimensions of assembly				滑 塊 尺 寸 Dimensions of block							
		H	h	W1	W	L1	B	C	t1	ℓ	S1	T	G
LMG-C12	12	34.5	19.5	2	36	34	26	24	7	10	M5	24	—
LMGL-C12						68		45					8
LMG-C16	16	45	25	2.5	45	45	32	30	9	12	M5	33	—
LMGL-C16						85		60					8
LMG-C20	20	50	27	1.5	48	50	35	35	11	12	M6	39	—
LMGL-C20						96		70					8
LMG-C25	25	60	33	2.5	60	65	40	40	14	12	M6	47	—
LMGL-C25						130		100					8
LMG-C30	30	70	37	5	70	70	50	50	15	18	M8	56	—
LMGL-C30						140		110					8
LMG-C40	40	90	48	7.5	90	90	65	65	20	20	M10	72	—

LMG-C25-B2-2400-CRS

1


2

3

4

5

- 1 Model No: LMG-C, LMGL-C
- 2 Shaft Diameter (mm)
- 3 Number of blocks per track rail: B1 : 1 Block B2 : 2 Blocks B3 : 3 Blocks,...
- 4 Length of track rail: (2400mm)
- 5 Blank: Shaft : Hardened(HRC 60±3)ground and chromium plated,Shaft type: SCFB(see page 16)
CRS : Shaft : ground and chromium plated,Shaft type: CRSB(see page 17)

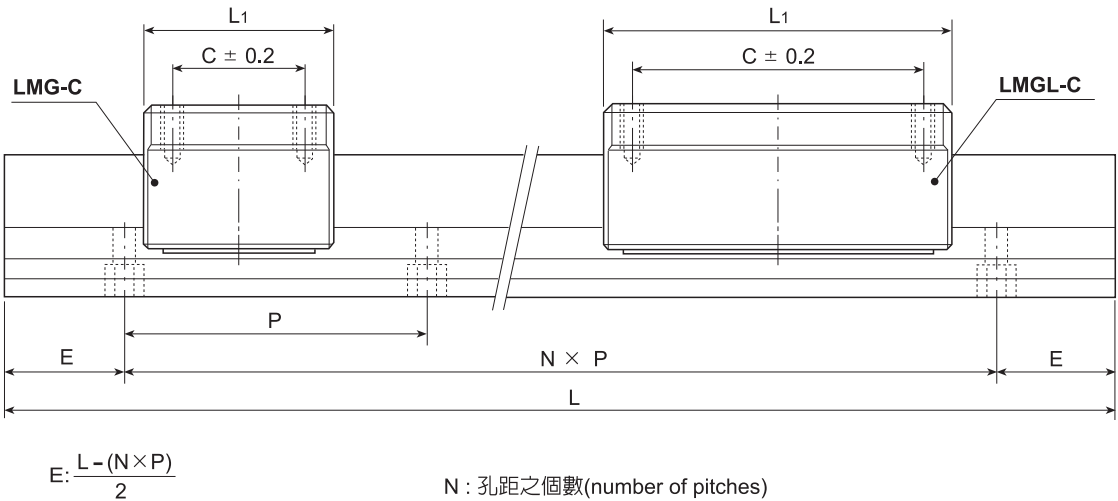

單位(unit)：mm

軌 道 尺 寸 Dimensions of track rail						最大靜荷重 Max Static Load	最大速度(m/min) Velocity Max (m/min)		型 號 Model No.
W2	P1	t2	P	S2	L (max)	Kgf / 1個滑塊 Kgf / One Block	無給油 Dry	給油 Lubrication	
32	23	4	100	4.5	3,600	340	40	120	LMG-C12
						680	40	120	LMGL-C12
40	30	5	150	5.5	3,600	620	40	120	LMG-C16
						1,240	40	120	LMGL-C16
45	30	5	150	5.5	4,200	880	40	120	LMG-C20
						1,760	40	120	LMGL-C20
55	35	6	200	6.5	4,200	1,500	40	120	LMG-C25
						3,000	40	120	LMGL-C25
60	40	7	200	6.5	4,200	2,000	40	120	LMG-C30
						4,000	40	120	LMGL-C30
75	55	9	300	9	4,200	3,300	40	120	LMG-C40

LMG-C25-B2-2400-CRS

1

2

3

4

5

1 型號：LMG-C, LMGL-C

2 軸徑(mm)

3 1支滑軌上滑塊之個數：B1：1個、B2：2個、B3：3個,...

4 滑軌長度：(2400mm)

5 無記號：軸心熱處理(HRC 60±3)鍍硬鉻及研磨，軸心:SCFB(參閱16頁)
CRS：軸心鍍硬鉻及研磨，軸心:CRSB(參閱17頁)